

Trench MOS Barrier Schottky Rectifier

DO-201AD

TSA



Cathode → Anode

Features

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant

Applications

- DC/DC Converters
- AC/DC Adaptors
- Switching Power Supplies
- Freewheeling Diodes

Maximum ratings and electrical characteristics ($T_J = 25^\circ\text{C}$ unless otherwise noted)






Parameter	Symbol	Limit		Unit
Maximum repetitive peak reverse voltage	VRRM	60		V
Maximum average forward rectified current	IF(AV)	8		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load per diode	IFSM	150		A
Operating junction and storage temperature range	T_J , TSTG	-5 to +150		°C
Typical thermal resistance per leg	DO-201AD	R _{JC}	22	°C/W
Instantaneous forward voltage per diode		VF(1)	TYP.	MAX.
	IF=2A		0.35	0.38
	IF=2A		0.30	-
	IF=8A		0.49	0.54
	IF=8A		0.44	-
Instantaneous reverse current per diode at rated reverse voltage	$T_J=25^\circ\text{C}$	IR(2)	-	uA
	$T_J=125^\circ\text{C}$		-	mA

Notes:


(1) Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≤ 40 ms


RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

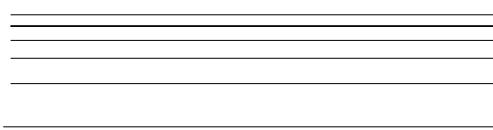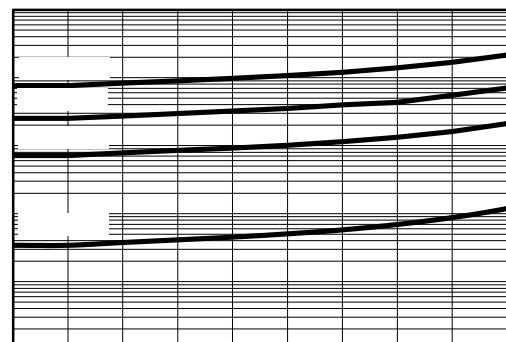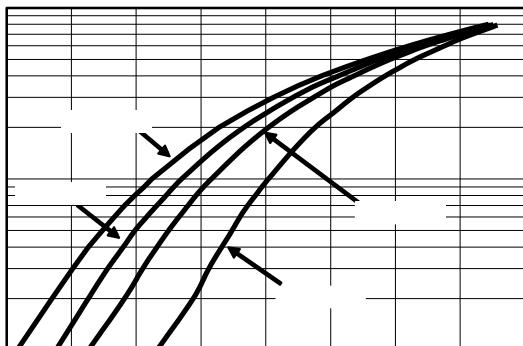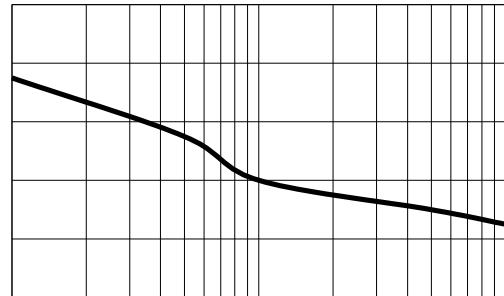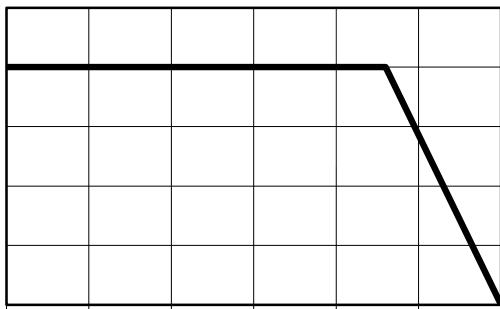

PACKAGE OUTLINE DIMENSIONS




Marking Information

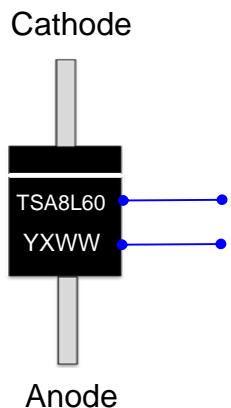


Product model : TSA8L60

PDC information

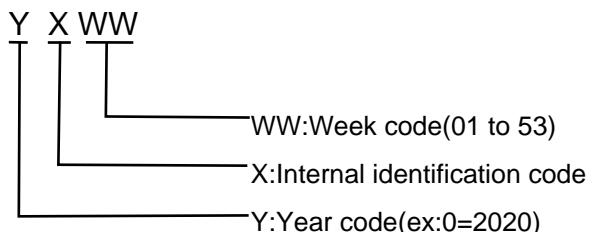


Packaging Information

1.Inside Box



2.Outside Box

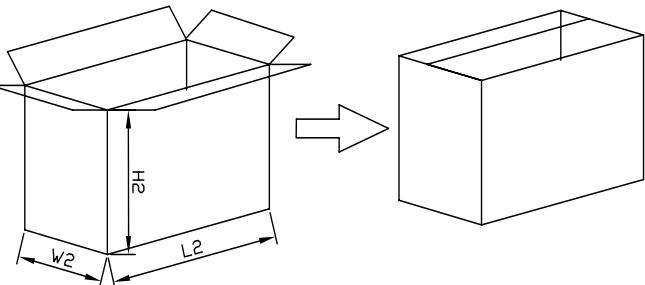

Packaging Information

NO	UNIT	Inside Box			Outside Box		
Size	mm	L1	W1	H1	L2	W2	H2
		255	75	1115	415	280	320
QTY	PCS	Smallest package,1000PCS/carton			10,000PCS/carton,10 boxes in total		
Note	Tolerance	20mm,±3mm; 21-100mm,±5mm; 101-500mm,±10mm					