




RATINGS AND CHARACTERISTICS CURVES

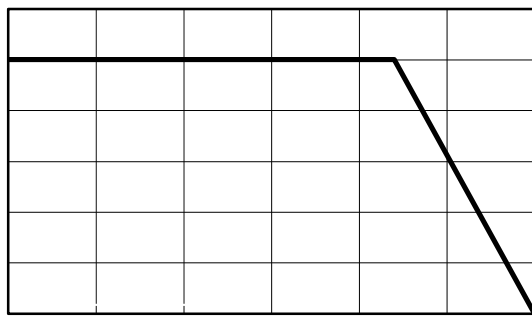


Current Derating, Case

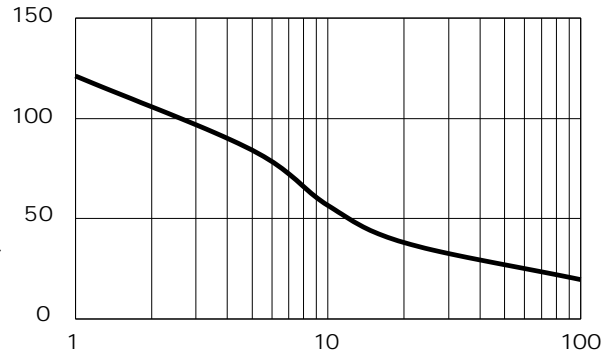


Maximum Repetitive Surge Current

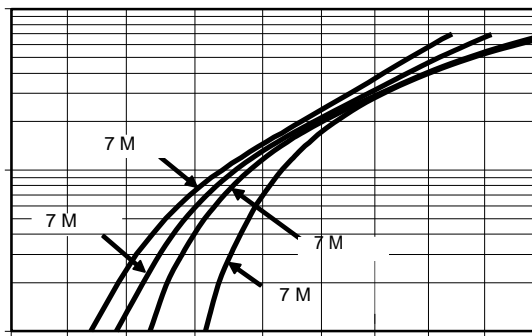

Typical Forward Voltage

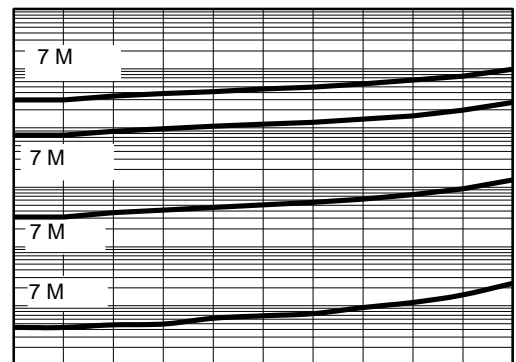


Typical Reverse Current

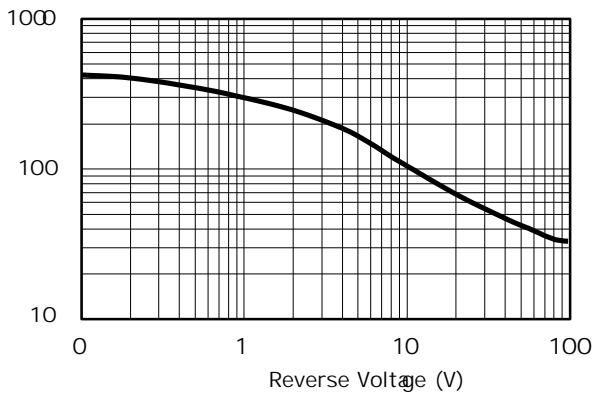

Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS

DO-201AD

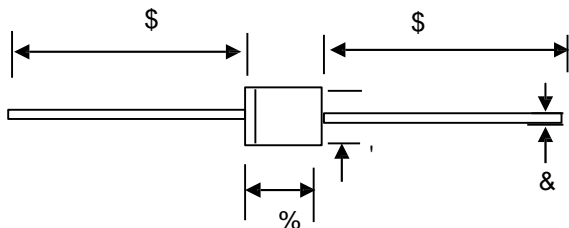


'2 \$' PHFKD QLFWD

81,7		\$	%		'
PP	PD[
	PLQ				
PLO	PD[
	PLQ				

0DUNLQJ ,QIRUPDWLRQ

&DWKRGH



\$QRGH

73URGXFW 76\$GH

83' & LQIRUPDWLRQ

< ; ::

:: :HHN FRGH WR


; , QWHLGH QWHLGH LFRGH LFRGH

< <H DU FRGH H[

3DFNDJLQJ ,QIRUPDWLRQ

,QVLGH %R[

2XWVLGH %R[

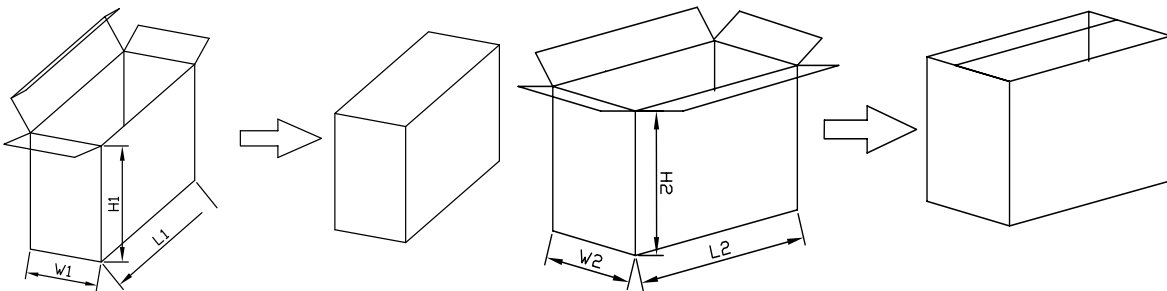

3DFNDJLQJ ,QIRUPDWLRQ

12	81,7	,QVLGH %R[2XWVLGH %R[
		/	:	+	/	:	+
6L]H	PP						
47<	3&6	6PDOSDFW DJH3&6 FDUWRQ			3&6 FDUWRQHLWRWDO		
1RW	7ROHUDQFH	PP" PP		PP" PP	PP" PP		