

7 UHQFK 026 %DUULHU 6FKRWWN\ 5H


d^Wîi>òì
!"

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZUZYRQWDJH GURS
- ‡ /RZRZUZYRQVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

ï

1



Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & \$GDSWRUV
- ‡ 6ZLWF&RQD&XSSOLHV
- ‡)UHHZKH'HL&GQJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH		9550		9
0D[LPHYHURJHZDUG	GHYLFH SHGLRGH	,) \$9		\$
3HDNIRVZDUEBUHQWVLCDDHQHZDYH VXSHULPSRVHGRFSCGUDRVGHG		,)60		\$
2SHUDMXQDQGRQWRUDJH WHPSHUDW		X0H76D*QJH	WR	f&
7\SLFVCHUPDO	USHVULVQHDQFH	72	5\$-&	f& :
,QVWDQWDQHRRQWRUJZDUG SHGLRGH			7<3	0\$;
	,) \$	7- f&		
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHQWRUJZDUG UDWHYHYURQWDJH		7- f&		X\$
		7- f&		P\$



1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES 7\$ f & X Q @ M K H Q Z L W H H G

3 32:(5',66,3\$7,21 :

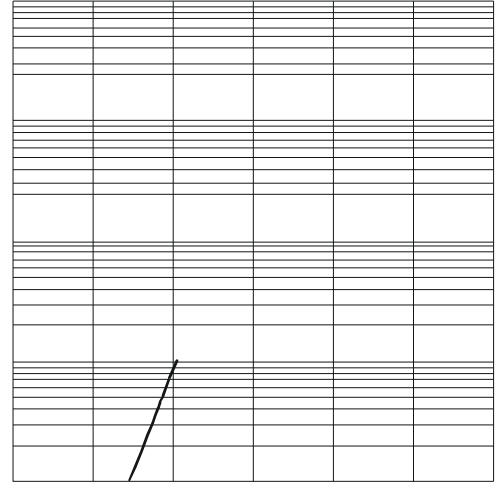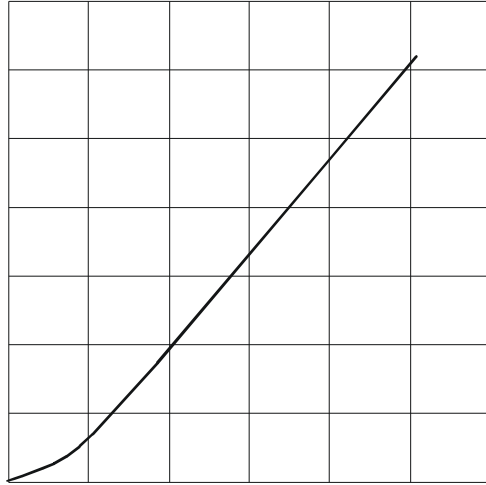


) \$9 \$9(5\$*()25:\$5' &855(17 \$
)LJXUH)RUZDUG 3RZHU 'LVVLSDWLRQ


PACKAGE OUTLINE DIMENSIONS

1 R W H X Q L W , Q P P

0DUNLQJ ,QIRUPDWLRQ

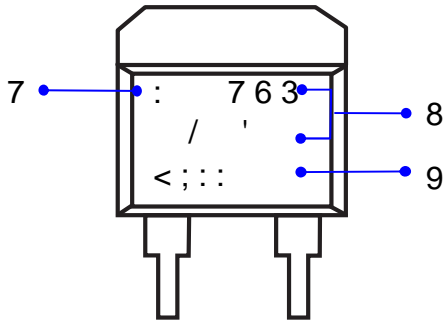


7 : &RPSDQ\ V WUDGHPDUN
83URGXFWRGHO 763 / '
93'& LQIRUPDWLRQ

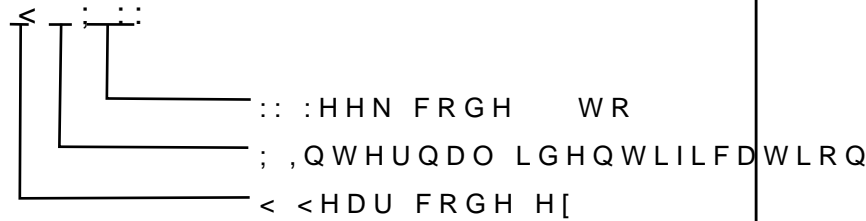


3DFNDJLQJ ,QIRUPDWLRQ



5HHO 'LPHQVLRQV



,QVLGH %R[

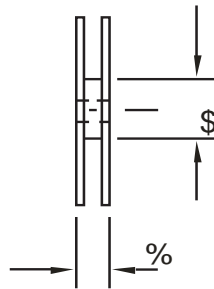

2XWVLGH %R[

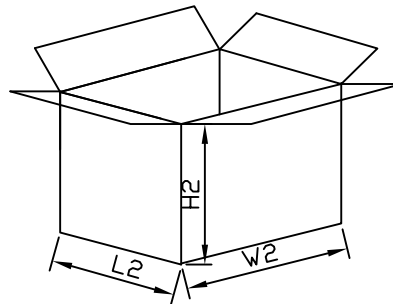

3DFNDJLQJ ,QIRUPDWLRQ

12	81,7	5HHO 'LPHQVLRQV			,QVLGH %R[2XWVLGH %R[
6L]H	PP	&	\$	%	/	:	+	/	:	+
47<	3&6 6PDO	SHVWDJH	3&6 UHHO	3&6 UHHO	WRWDO	3&6 FDU	WRWDO	WRWDO	WRWDO	WRWDO
1RWH		7ROHUDQFH PP" PP			PP" PP			PP" PP		