



/RZ 9) %ULGJH 5HFWLILHUV



:YUhiFYg

- Glass Passivated Chip Junction
- Š[ , ÁQÜÜT
- Š[ , ÁXø
- Pã\* @ÁXÜÜT



6YbYZ]hg

- Case: GÓJ
- Terminals: Solderable Per MIL-STD-750
- Ü^ã~&^ãÁ [ , ^!Á [ ••Áæ } áÁ • , áç&@ã } \*Áç!æ } •ãç [ !
- ~ Ü^ã~&^ãÁ • } ~ àãã } \*

0D[LPXP5DWLQDQGOHFWBKBDQDFWHULVWLFV

5DWLQWVf&DPELMQWVSHUXQDQXUMKHU/ZLHFLILHG


6LQJOH SKDVH KQ QIHZ/D VMUQYXK FVRDYGHSDFLWEXWU G-RDVE WH

3DUDPHWHU	6\PEROV	*% - /	8QLWV
0D[LPXP 5HSHWLWLYH 3HDN 5H5U VH 9ROWDJH	9506		9
0D[LPXP 506 YROWDJH	9506		9
0D[LPXP '& %ORFNLQJ 9ROWDJH &			9
\$YHUDJH 5HFWLILHG 2XWSXW &RUUHQW			\$
3HDN )RUZDUG 6XUJH &XUUHQW PV 6LQJOH +DOI 6LQH :DYH 6XSHULPSRV, HGO RQ 5DWHG /RDG -('(& 0HWKRG			\$
0D[LPX)RUZDUG WDW H \$	9)		9
0D[LPXP '& 5HYHUVH &XUUHQW #7\$ DW 5DWHG '& %ORFNLQJ 9ROWDJH #7\$		f & f &	\$
7\SLFDO -XQFWLRQ &RVSDFLWDQ&H			S)
2SHUDWLQJ DQG 6WRUDJH 7HPSW WDWXUH 5DQJH a			f &
1RWH0HDVX D MCG+ ] DQG S SOLLHGHYUQVWRD JH& 0RXQWHG RQ JODVV HSR(\ 3& ERDUG ZLW(F) PRSSHU SDG			

\*% - / 5HY


:RUOG , QWH&JQDMLFLQVHOG

RATINGS AND CHARACTERISTICS CURVES

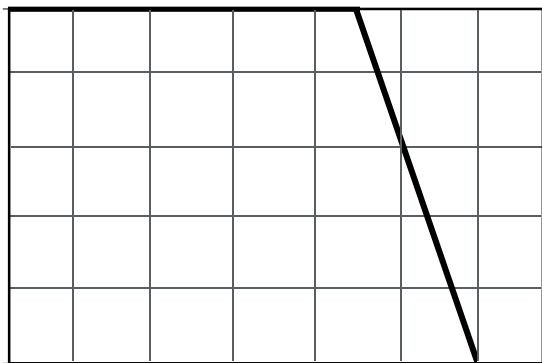


7 F & DVH 7 & HPS

Current Derating, Case

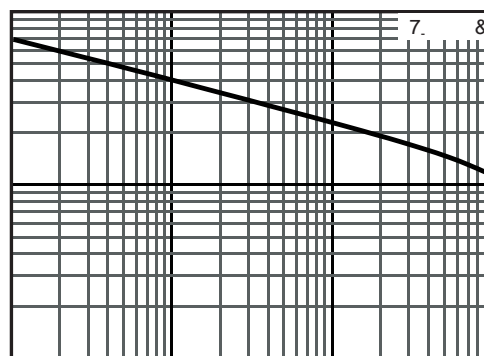


Typical Junction Capacitance

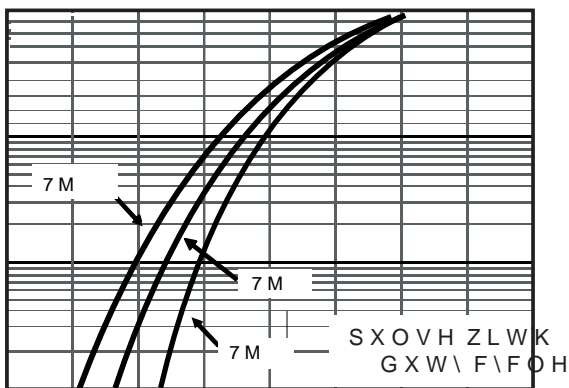

91, QVWDQWDQHR9R0V RDZDUG

Typical Forward Voltage

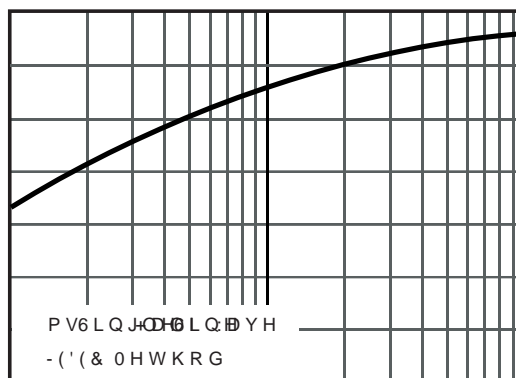

95 5HYH9R0WDJH 9ROWV

Typical Reverse Current

\*% - / 5HY

:RUOG , QWH&JQLDMLFLQVHCG

---

3 \$ & . \$ \* ( 2 8 7 / , 1 ( ' , 0 ( 1 6 , 2 1 6